

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number  
**WO 03/062731 A1**

(51) International Patent Classification<sup>7</sup>: **F28F 1/12**

(21) International Application Number: PCT/IB03/00147

(22) International Filing Date: 22 January 2003 (22.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/053,670 24 January 2002 (24.01.2002) US

(71) Applicant (for all designated States except US): **VALEO INC.** [US/US]; 3000 University Drive, Auburn Hills, MI 48326 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HU, Zaiquan** [CN/US]; 3119 Griffa Avenue, Columbus, IN 47203 (US). **LE GAUYER, Philippe** [FR/FR]; 25, rue Pradier, F-75019 Paris (FR). **FANG, Lei** [CN/US]; 143-09 Halsey Dr, West Lafayette, IN 47906 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 03/062731 A1

(54) Title: FIN LOUVER DESIGN FOR HEAT EXCHANGER

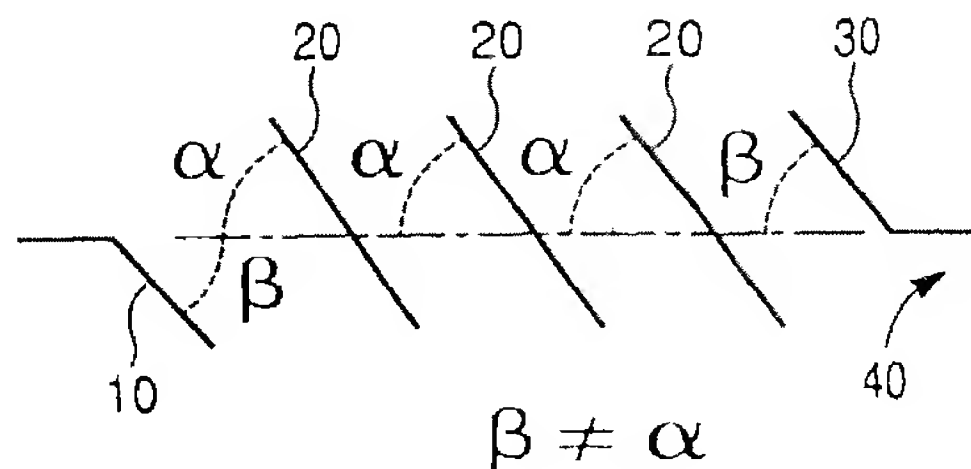

(57) Abstract: A fin louver design using breaking (10) and reversal (30) louvers whose lengths (W) are substantially longer than the half-length of the main louver (20) but at slightly lower angles (3) to the fin face, in order to increase the heat transfer while reducing or minimizing the airside air pressure drop. The reversal louvers (30) will not dramatically change the airflow direction but rather permit air to follow the louver direction, thus preventing any dead area where the air speed is approximately zero in the central part between the two reversal louvers. Contact is provided between fresh moving air and the central part (40) between the two reversal louvers (30).

## FIN LOUVER DESIGN FOR HEAT EXCHANGER

BACKGROUND OF THE INVENTION

## 1. Field of the Invention

The present invention provides an improved fin design and, more particularly,  
5 provides an optimized fin design in order to increase the heat transfer while reducing or  
minimizing any airside air pressure drop.

## 2. General State of the Art mod pertinent to invention:

Air-cooled heat exchangers are used extensively by the automotive industry. In  
10 such an exchanger, the tubes carry the coolant, refrigerant, oil or hot air to be cooled.  
Fins are added to the outside of the tube to increase the contact surface area between the  
heat exchanger tubes and the outside air flowing across them. The air has thermal  
conductivity and convection coefficients that are very low. Louvers can be added to the  
fins in order to enhance the airside thermal efficiency and can significantly increase heat  
15 transfer by reducing the thermal resistance.

Each fin cross section has at least one set of louvers having two blocks. Each  
louver set usually has the forward and rearward blocks symmetrical to each other about  
the center of the set. Each block has a breaking (first) louver 1, one or several normal  
(main) louvers 2 and a reversal (center or last) louver 3 and may also have a center  
20 neutral (flat) area 4 as shown in Figure 1. Traditionally, the breaking louver and the  
reversal louver have a shorter width than the normal louvers, in order to give more space  
to increase the number of normal louvers.

Another louver design can also be used such as the one shown in Figure 2. In this louver block the reversal louver has the same width 'w' as the normal louvers but does not have a central flat area, such as is shown in Figure 1. Still other louver designs have both full width breaking and reversal louvers, as well as the central flat area, such as are shown in the Figure 3.

Despite the advantages of each of these different louver designs, they all have some drawbacks. The louver block design in Figure 2 is deficient because the two reversal louvers dramatically change the airflow direction. Air cannot follow the louver direction, resulting in dead area where the air speed is approximately zero in the central part between the two reversal louvers. As a result, there is no contact between "fresh moving" air and the central part between the two reversal louvers.

The louver in Figure 1 brings in some improvement by adding central flat area, allowing air to flow along the profile of louver, hence increasing the contact between the "fresh moving" air and the inside of the center neutral area between the two reversal louvers. However, because both the breaking and reversal louvers have reduced louver width, their primary function of directing air in through the louvers is compromised. This is particularly true for the case where the core depth of heat exchanger is very limited to approximately 30 mm or less, which covers many of the automotive applications. In these cases, each block has only few main louvers. If air does not flow in a direction along the main louvers, after the breaking or reversal louver, then these few main louvers lose their efficiency.

A fin with louvers such as those shown in the Figure 3 solved this issue by using full width breaking and reversal louvers, as well as central flat area. However, it creates

a new problem. In fact as shown in the Figure 3, the full width breaking and reversal louvers block the airflow direction to some extent. This design creates a much higher air-side pressure drop, which in turn reduces the overall air-side heat transfer for a given "ram" air intake or for a given fan air flow capability.

5

#### SUMMARY OF THE INVENTION

The object of the present invention is to overcome the drawbacks inherent in the prior art because the reversal louvers will not dramatically change the airflow direction but rather permit air to follow the louver direction, thus preventing any dead area where the air speed is approximately zero in the central part between the two reversal louvers. The present invention provides a contact between fresh moving air and the central part between the two reversal louvers.

It is a further object of the invention to minimize air-side pressure drop, thereby preventing reduction in the overall air-side heat transfer for a given "ram" air intake or for a given fan air flow capability.

The invention optimizes the fin design using breaking and reversal louvers whose lengths are substantially longer than the half-length of the main louver but at slightly lower angles to the fin face, in order to increase the heat transfer while reducing or minimizing the airside air pressure drop.

20

### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a conventional fin louver block showing a short common angle breaking louver with common angle main louvers, a short common angle reversal louver and a neutral flat center area.

5        Figure 2 illustrates a conventional fin louver block showing a short breaking louver with common angle main louvers, a common angle full length reversal louver with no neutral flat center area.

Figure 3 illustrates a conventional fin louver block showing common angle full-length breaking louver, common angle main louvers and common angle full-length  
10 reversal louver with a neutral flat center area.

Figure 4 illustrates a fin louver block showing lower angle full-length breaking louver, main louvers and lower angle full-length reversal louver with a neutral flat center area in accordance with this invention.

Figure 5 illustrates a heat transfer and delta pressure drop chart using various  
15 angles of a full length breaking louver, 17° angle main louvers and various angle, of a full length reversal louver with a neutral flat center area.

Figure 6 illustrates a heat transfer and delta pressure drop chart using various angles of a full length breaking louver, 23° angle main louvers and various angles of a full length reversal louver with a neutral flat center area.

20        Figure 7 illustrates a "base" fin model (upper fin pattern) and an "improved" fin model (lower fin pattern) built into heat exchangers for heat transfer testing. The "base" fin louver set using a 24° angle short length breaking louver, 24°/28°/24° angle main louvers and 24° angle short length reversal louver with a neutral flat center area. The

"improved" fin louver set using a 20° angle full-length breaking louver. 24°/28°/24° angle main louvers and 20° angle short length reversal louver with a neutral flat center area.

Figures 8 and 9 shows the optimum range of parameters based on the results of computational fluid dynamics (CFD) in terms of  $\delta$ :  $0.51 \leq \delta \leq 0.96$ .

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 4 presents the basic idea of this invention. Each of the fin louver blocks has a breaking louver 10, several full louvers 20, and a reversal louver 30. There is a flat area 40 between the two reversal louvers. The lengths of breaking louver and/or the reversal louver are significantly wider than half of the width of other normal louvers (in the figure 4 where both breaking and reversal louvers have the same width as other louvers).

One key feature of this new design here is the angle of the breaking louver and that of reversal louver. In order to reduce the blockage effect of the air passage, the angle of breaking lower and that of the reversal louver are less than that of normal louvers. At the same time, they are bigger than one third of the angle of normal louvers. In the example shown in the Ffigure 6, the angle of breaking louver equals that of the reversal louver. However, that is just one option available to one skilled in the art considering the benefits and advantages provided by this unique design.

In the simulation provided herein, the number of louvers was reduced by 1 on each block of louvers in order to use full-louver length breaking and reversal louvers. In this way, the total fin width is kept the same. In order to compare to the original louver

configuration (2 half louvers for the breaking and reversal louvers), the heat transfer and air pressure drop values of the original louver configuration were put to one (1) to normalize the heat transfer and air pressure drop results.

Figure 5 shows CFD results of the influence of the angle of breaking louver (reversal louver) on the heat transfer and air pressure drop. In this case, the angle of normal louvers is 17 degrees, and fin-pitch/louver-width ratio equals 0.9. When the angle of the breaking louver is close to  $\frac{1}{2}$  of normal louver angle (e.g.,  $\sim 8.5^\circ$ ), the heat transfer is down compared to the original louver configuration. At the same time, the air pressure drop is also reduced. When the angle of breaking louver is increased, the heat transfer reduction is reduced, and this trend continues until 14 degree where the heat transfer reduction is extremely small. Any further increase of the angle of breaking louver will increase the heat transfer reduction, as well as air pressure drop. Therefore, there is an optimal range of angle of breaking louver within which the heat transfer reduction is almost non-existent, and at the same time, we get significant reduction in air pressure drop (this case 6%).

Figure 6 gives another example of optimization of breaking louver angle. When the angle of normal louvers is 23 degrees, fin pitch / louver width ratio equals 1.1, one can see from the chart of Figure 6 that the optimized range of breaking louver angle is between 16-19 degrees, where the reduction in heat transfer is only about 0.4%; however, the reduction in air pressure drop is about 4-5%.

In general, we found that the  $\lambda$  (ratio of angle of breaking louver over the angle of normal louver) should be within the following range:

$$0.5 \leq \lambda \leq 0.95$$



in order to get the optimized heat transfer and air pressure drop. And the best angle range is very close between 0.7 and 0.85.

Of course, this idea should be combined with the use of a central flat part, as shown in the Figure 1.

5 In order to generalize the above results, a factor  $\delta$  is introduced to define the ratio of reduction of free air passage by the full length breaking and reversal louver, in order to take into account of air pressure drop. With the half length breaking and reversal louver, the free air passage is  $F_p - L_p \sin(\alpha)$ ; where  $\alpha$  is the angle of normal louvers;  $F_p$  is fin pitch, and  $L_p$  is louver width.

10 With the full length breaking and reversal louver and central flat area, the free air passage area is:

$$F_p - \max(L_p \sin(\alpha), 2 L_p \sin(\beta));$$

where  $\beta$  is the angle of breaking and reversal louver.

Therefore, the factor  $\delta$  is defined as:

$$\delta = (F_p - \max(L_p \sin(\alpha), 2 L_p \sin(\beta)) / (F_p - L_p \sin(\alpha)) =$$

$$(1 - L_p / F_p \max(\sin(\alpha), 2 \sin(\beta))) / (1 - L_p / F_p \sin(\alpha)). \quad (\text{equation 1})$$

With this definition, it is possible to re-formulate the optimum range of parameters based on the results of CFD in terms of  $\delta$ :

$$0.51 \leq \delta \leq 0.96, \quad (\text{equation 2})$$

20 as shown in the Figures 8 and 9.

And its best range is between 0.55 and 0.75.



In more general terms where the length of breaking louver or reversal louver is  $L_{pb}$  and the angle of breaking louver is  $\beta_b$ , the angle of the reversal louver is  $\beta_r$ , it is possible to define  $\delta_b$ , for the breaking louver as,

$$\delta_b = (F_p - \max(L_p \sin(\alpha), 2L_{pb} \sin(\beta_b)) / (F_p - L_p \sin(\alpha)) =$$

$$(1 - L_p/F_p \max(\sin(\alpha), 2L_{pb} \sin(\beta_b)/L_p) / (1 - L_p/F_p \sin(\alpha))). \text{ (equation 3)}$$

It is also possible to define  $\delta_r$ , for the reversal louver as,

$$\delta_r = (F_p - \max(L_p \sin(\alpha), 2L_{pb} \sin(\beta_r)) / (F_p - L_p \sin(\alpha)) =$$

$$(1 - L_p/F_p \max(\sin(\alpha), 2L_{pb} \sin(\beta_r)/L_p) / (1 - L_p/F_p \sin(\alpha))). \text{ (equation 4)}$$

And equation 1 is the special case for the equations 3 and 4 where  $L_{pb} = L_p$  and

$$\beta_b = \beta_r = \beta.$$

The following table shows test results comparing two louver configurations shown in the Figure 7.

	Heat Transfer		Air pressure drop	
	Two semi-length louver configuration $\delta=1.0$	Full length breaking & reversal louver $\delta=0.59$	Two semi-length louver configuration $\delta=1.0$	Full length breaking & reversal louver $\delta=0.59$
$V_{air} = 2.5\text{m/s}$	Base	-0.7%	Base	-7.8%
$V_{air} = 4.0\text{m/s}$	Base	-1.2%	Base	-10%

These experimental results confirm our CFD results, and support the validity of the equation 2.

The reason for this improvement is as follows. By using full length breaking and reversal louvers, air is better guided to flow into the louver direction. And this is true not only for the first louver block, but also for the second louver block. Therefore, heat transfer is significantly enhanced. Since the invention keeps the same fin width, it reduced one fin louver on each louver block. This reduction in number of louver results

in lower pressure drop, as well as reduction in heat transfer. Therefore, combining the two factors lead to same heat transfer, and significantly reduced air pressure drop.

While the instant invention has been shown and described with reference to several preferred embodiments and features, it will be understood by those of skill in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the claimed invention.

What is claimed:

1. A fin system having at least one louver set used to enhance the transfer of heat from a first medium to a second medium, said louver set comprising:

5       at least two blocks of louvers, each block having a first breaking louver, one or more main louvers and a reversal louver and between the central reversal louvers is a flat area,

      wherein the length of said first breaking louver and the length of the reversal louver are substantially wider than half of the length of the main louvers as measured  
10       across flat areas of the first breaking louver, the reversal louver and the main louver,  
      and wherein first angles of orientation of at least one of the breaking louver and the reversal louver are lower than a second angle of orientation of the main louvers when measured relative to a fin face from which the louvers protrude.

15       2. The fin system as recited in Claim 1, wherein the breaking louver has an angle of orientation relative to the main fin face such that the factor of ratio of reduction of free air passage is between 0.51 and 0.96.

      3. The fin system as recited in Claim 2, wherein the factor of ratio of reduction of  
20       free air passage is between 0.55 and 0.75.

4. The fin system as recited in Claim 1, wherein the reversal louver has an angle of orientation relative to the main fin face such that the factor of ratio of reduction of free air passage is between 0.51 and 0.96.

5 5. The fin system as recited in Claim 1, wherein the factor of ratio of reduction of free air passage is between 0.55 and 0.75.

6. The fin system as recited in Claim 1, wherein at least one of said two blocks of louvers contains a breaking louver and a reversal louver both having substantially the  
10 same angle relative to the fin face.

7. The fin system as recited in Claim 1, wherein at least one of said two blocks of louvers contains a breaking louver and a reversal louver both having substantially the same length as the main louvers.

15

Fig. 1

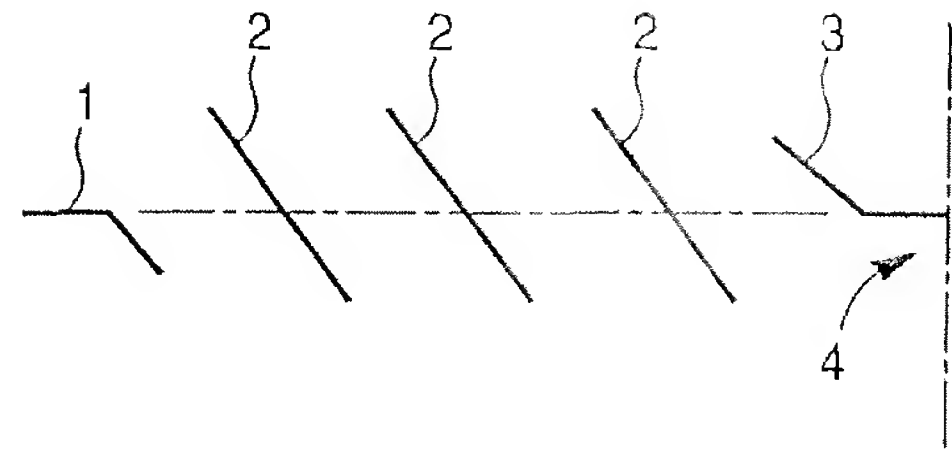


Fig. 2

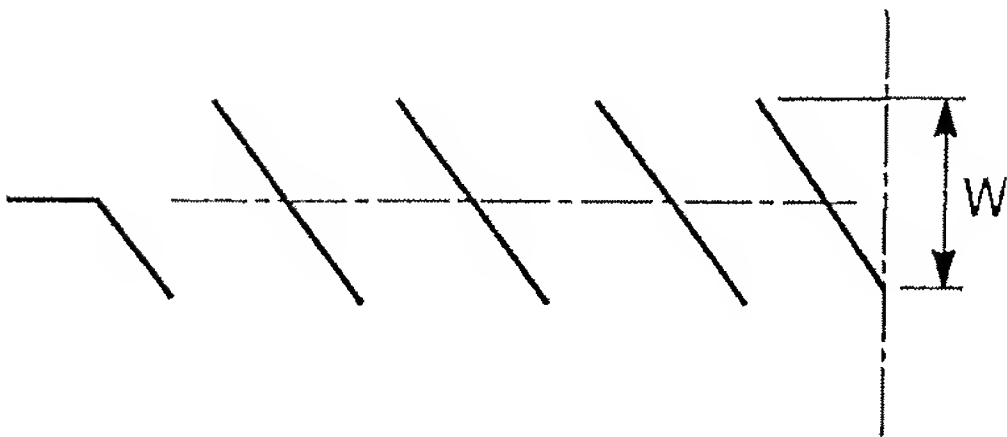


Fig. 3

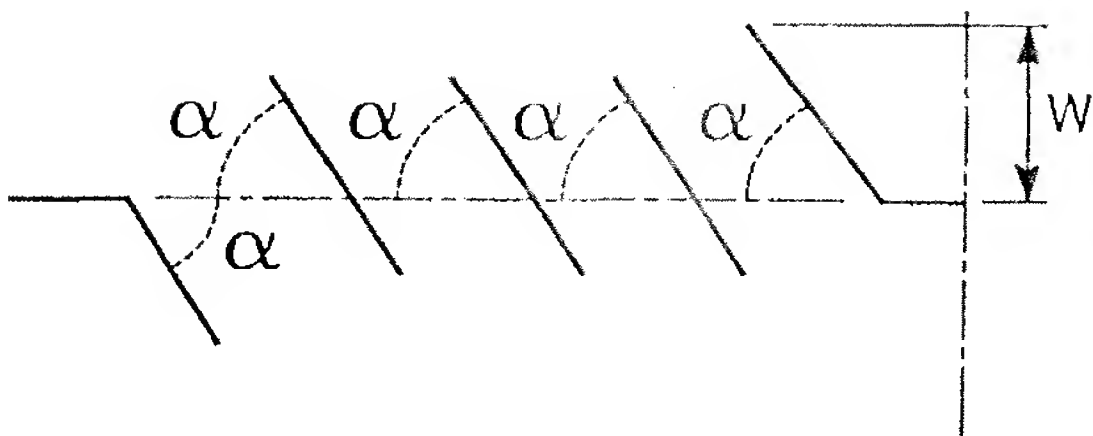


Fig. 4

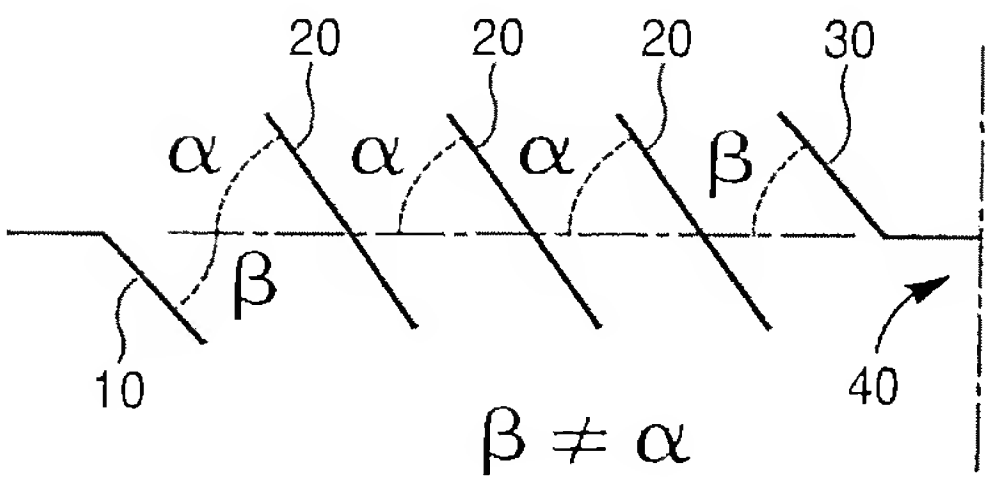
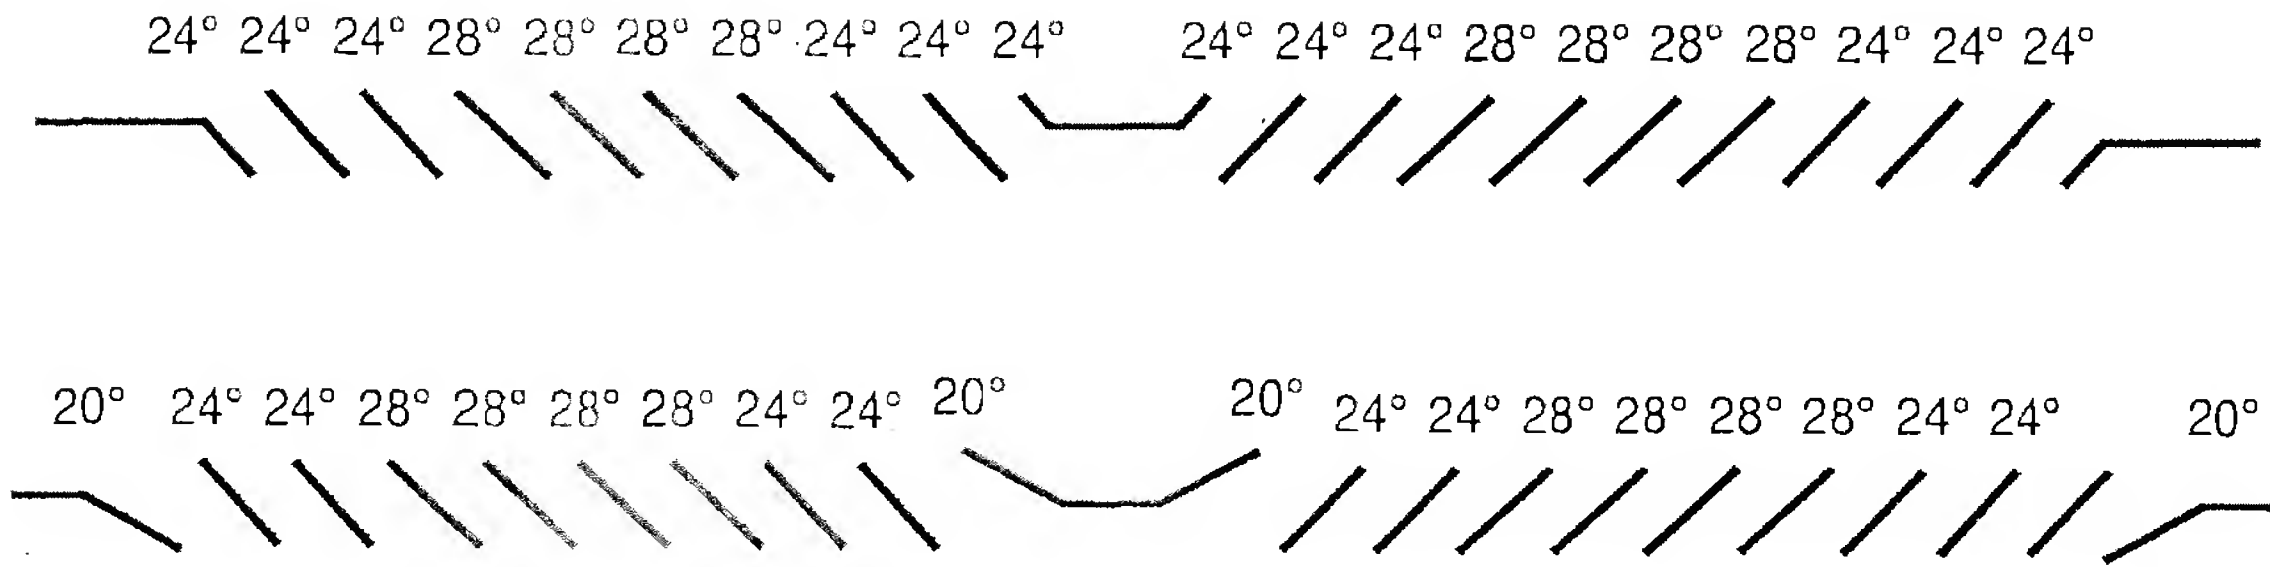


Fig. 7



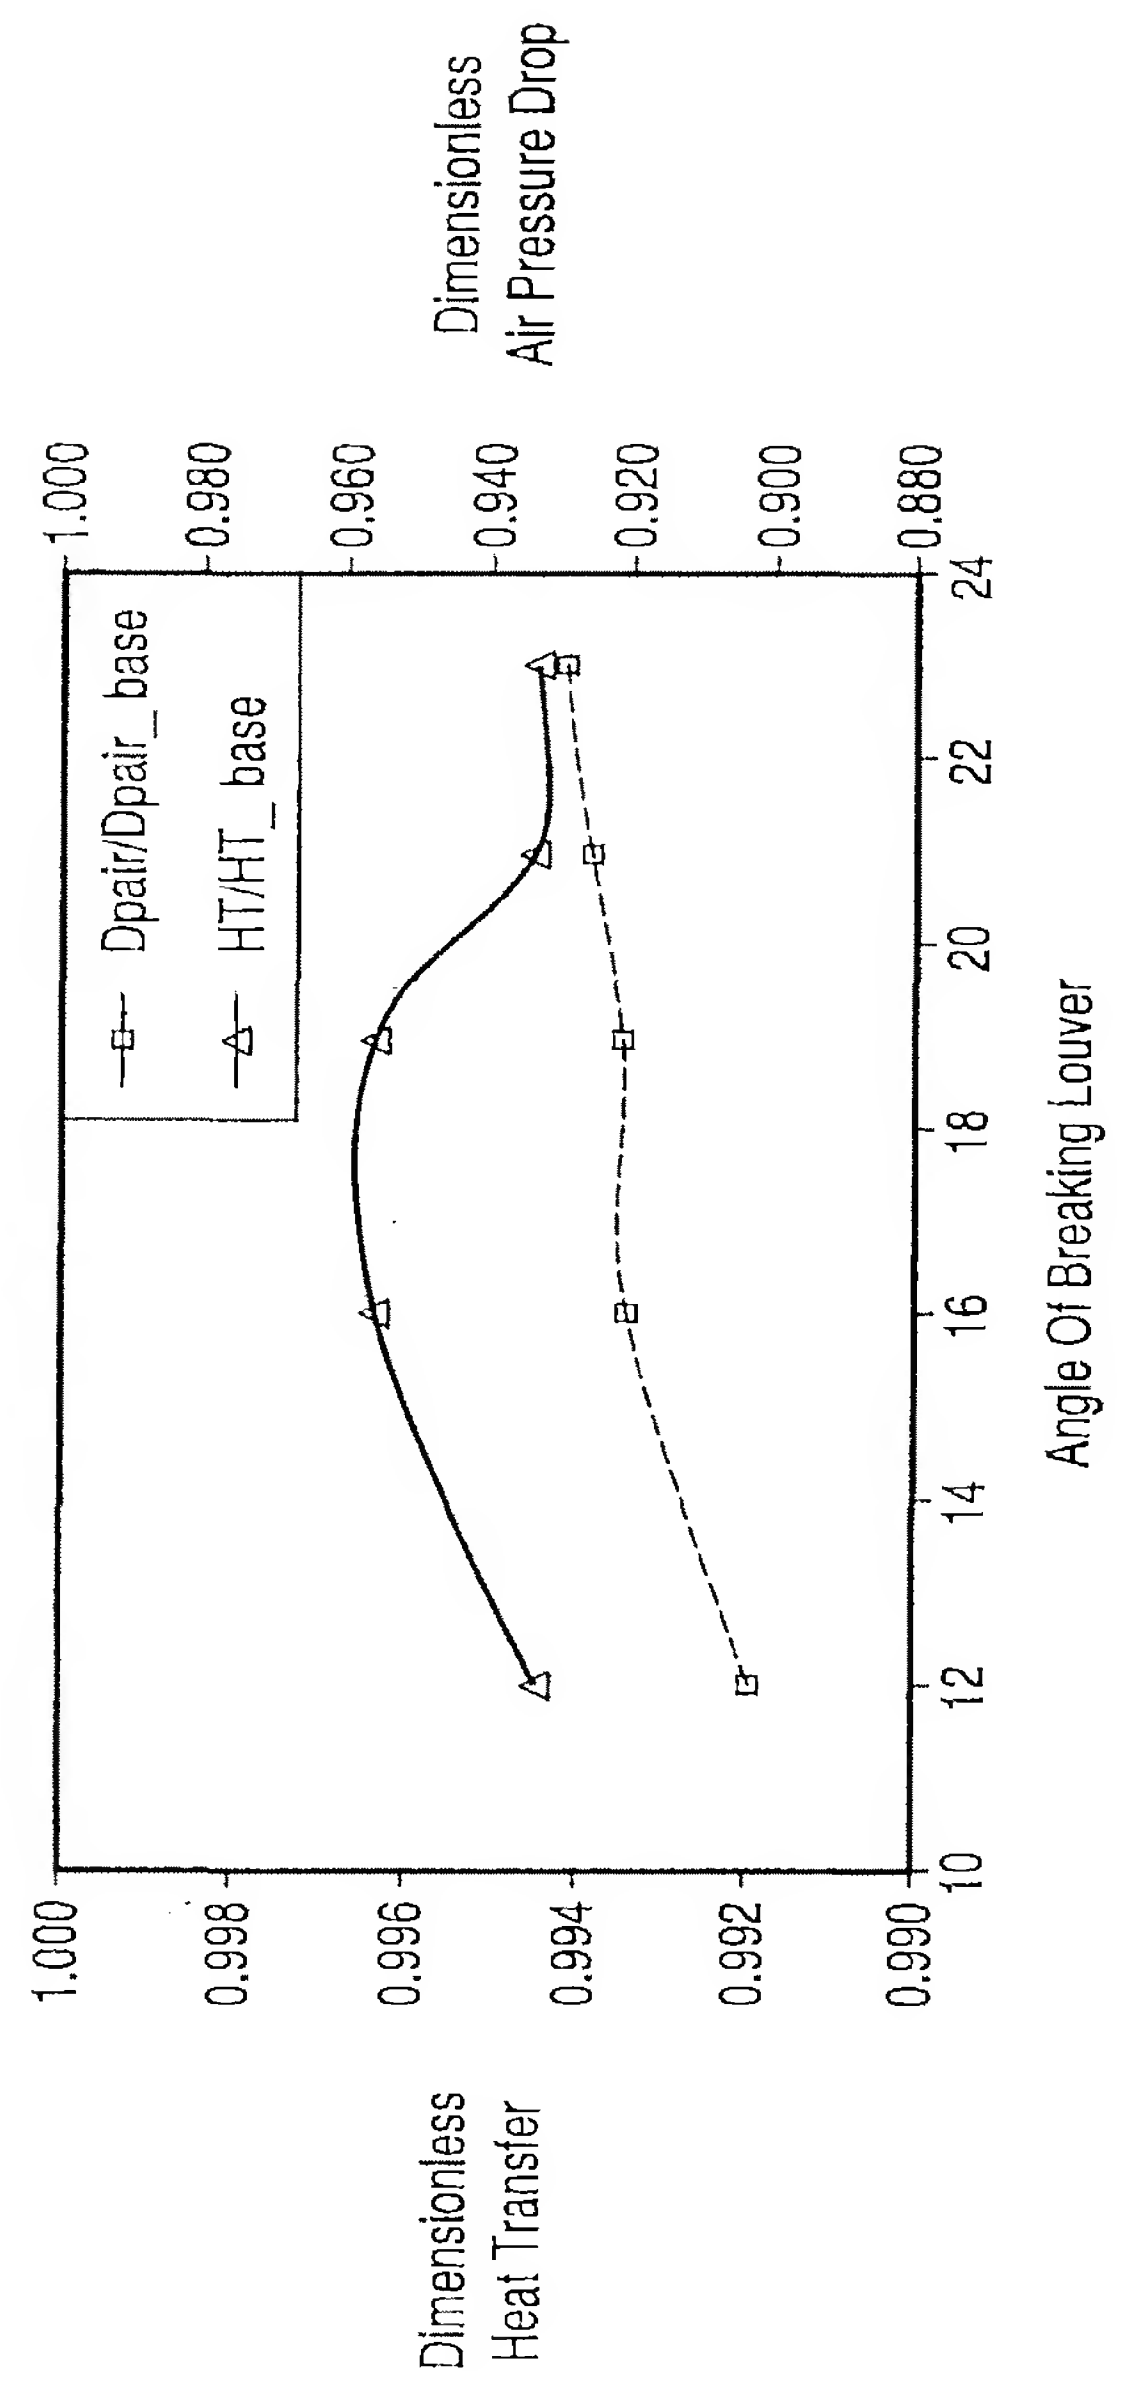
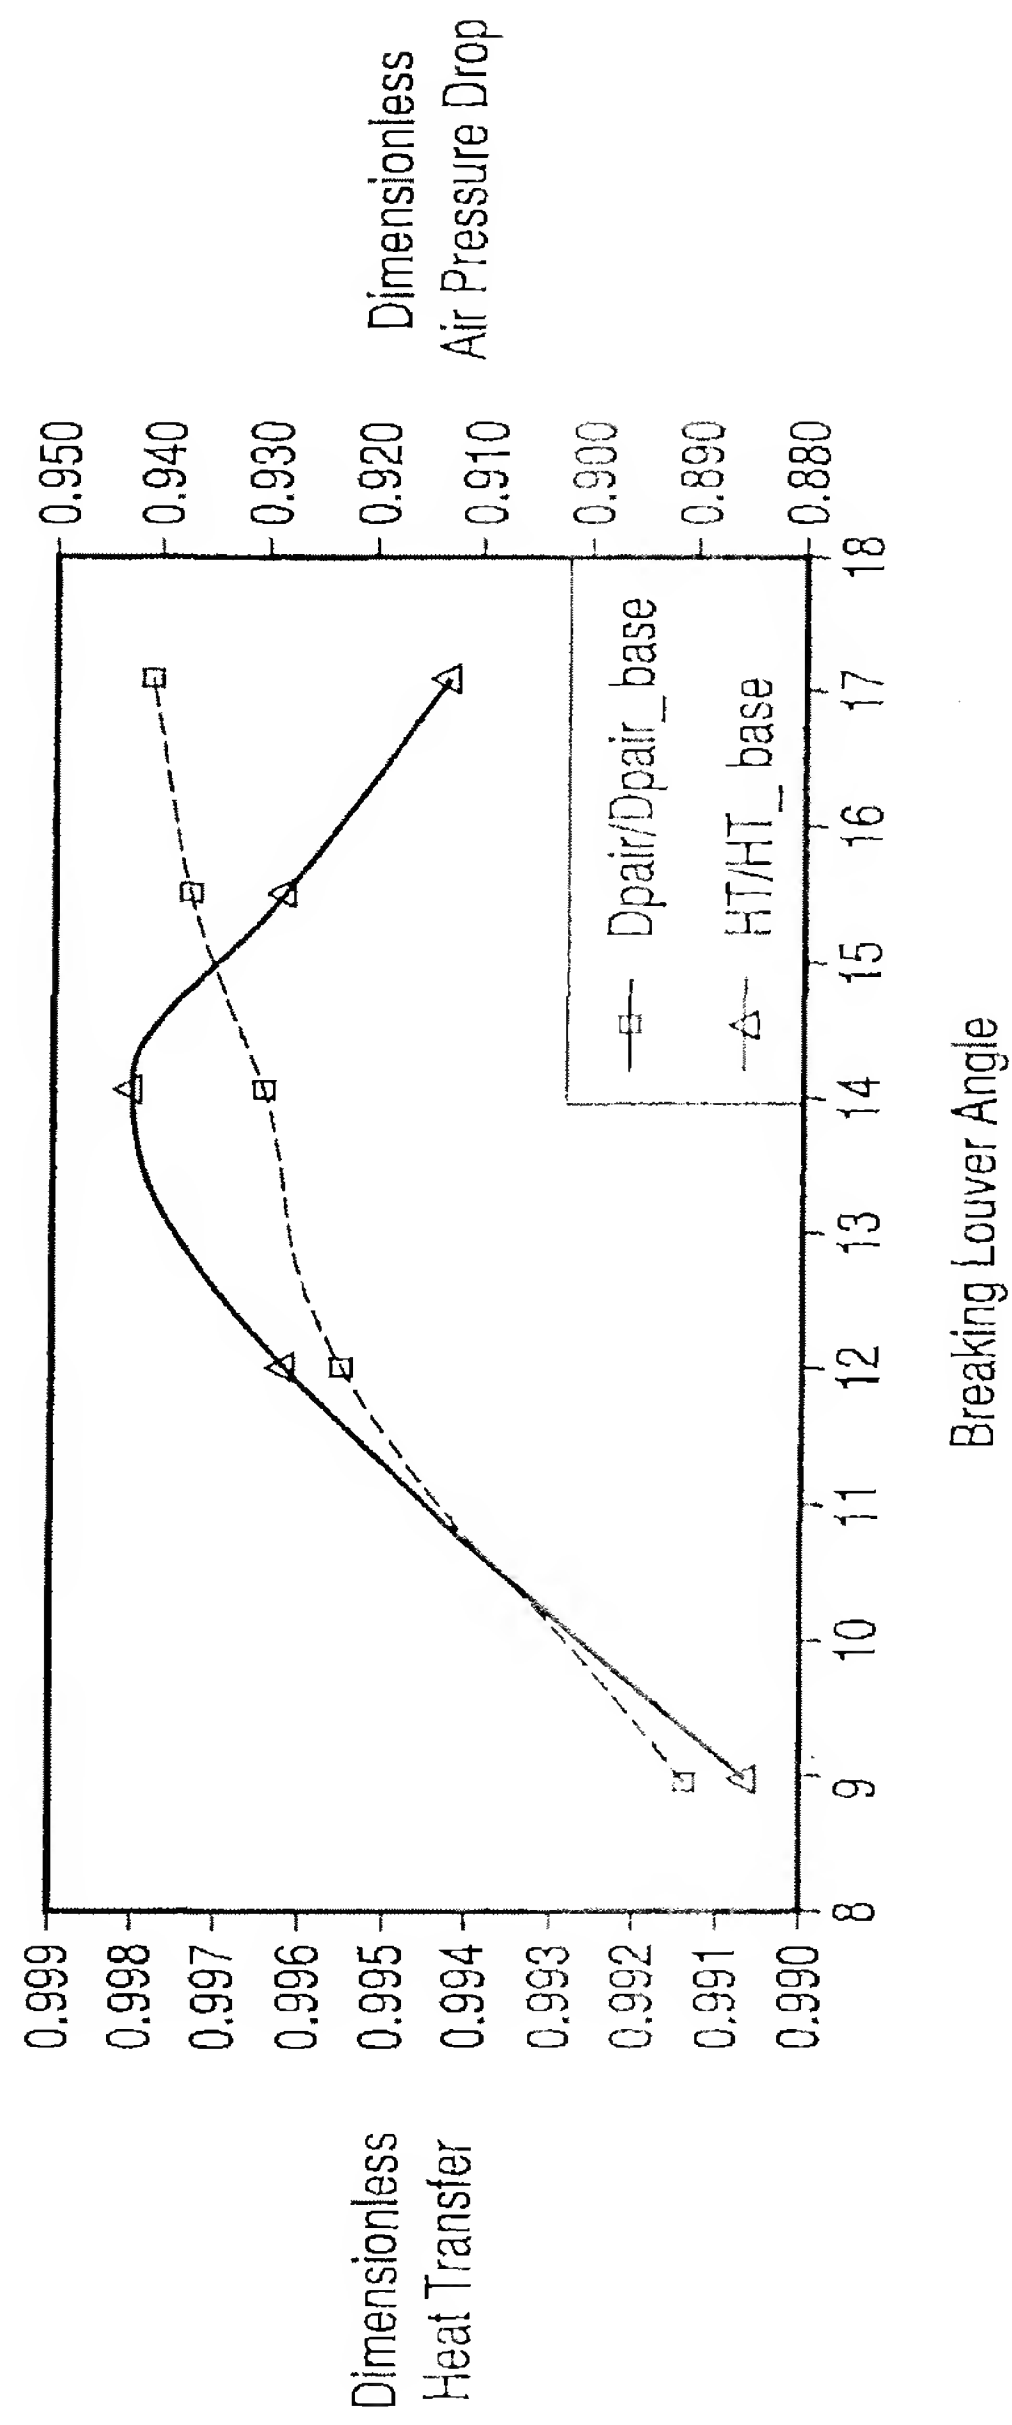


Fig. 8


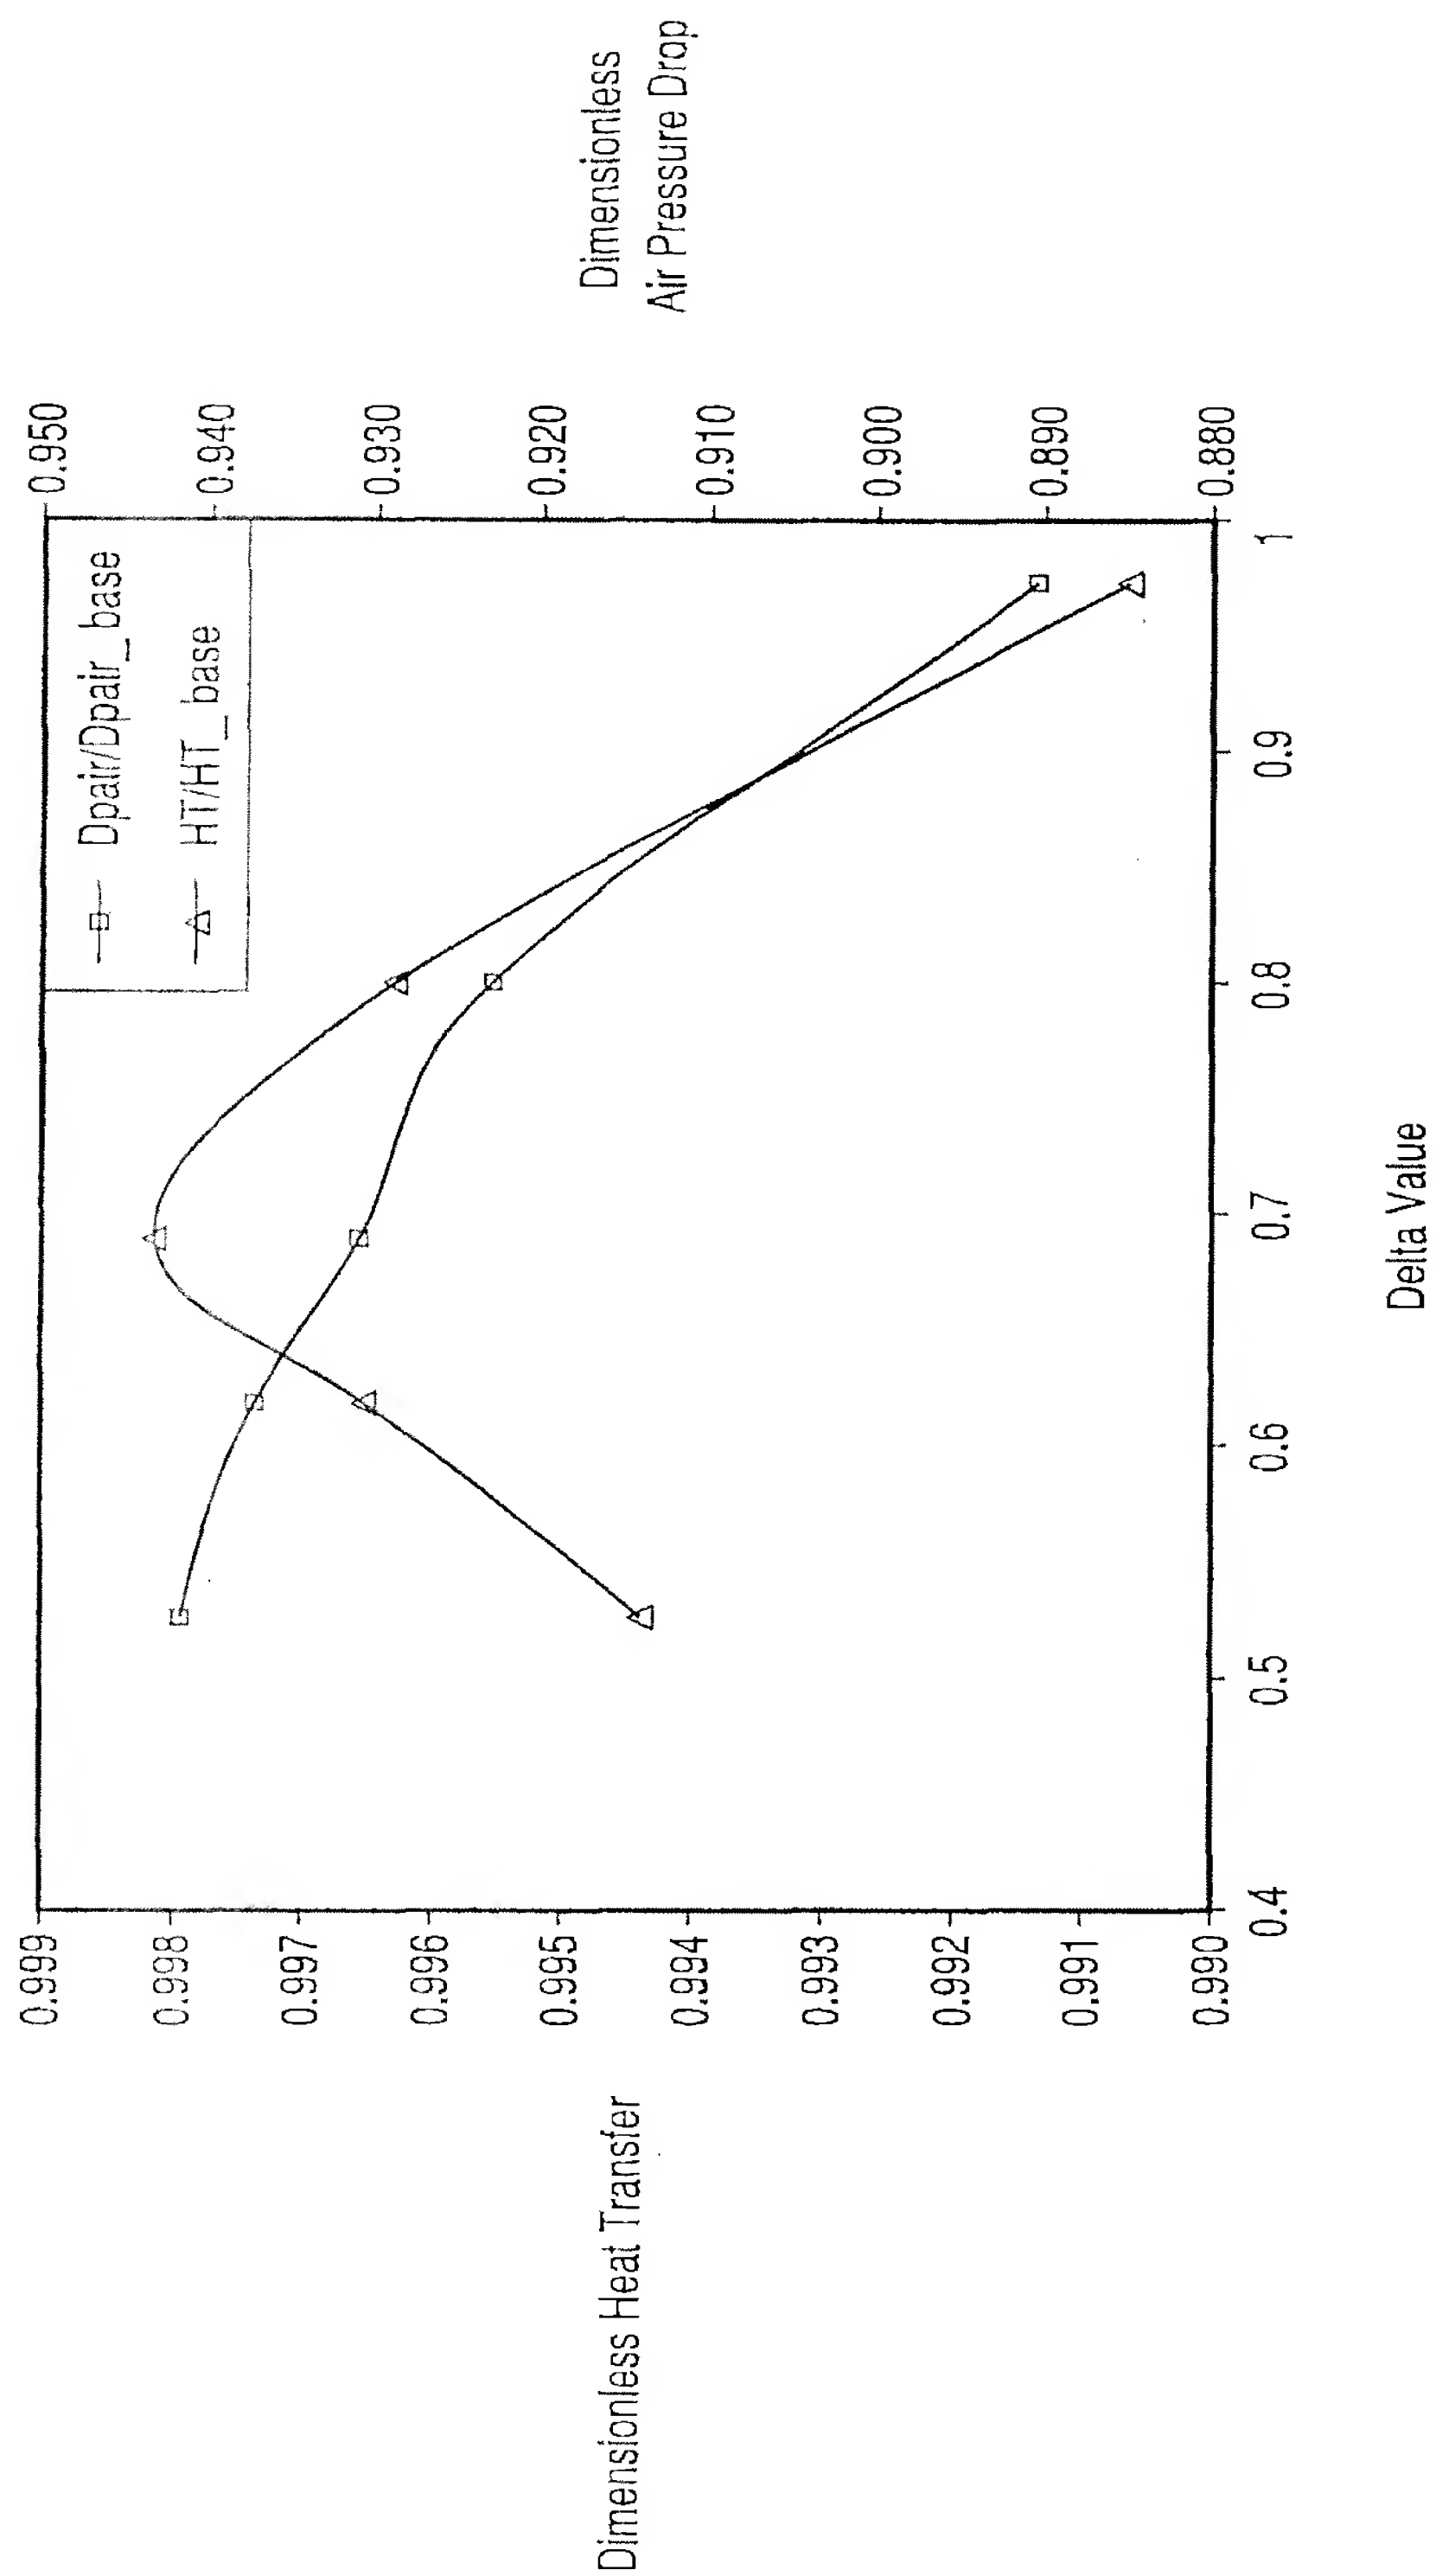




Fig. 9

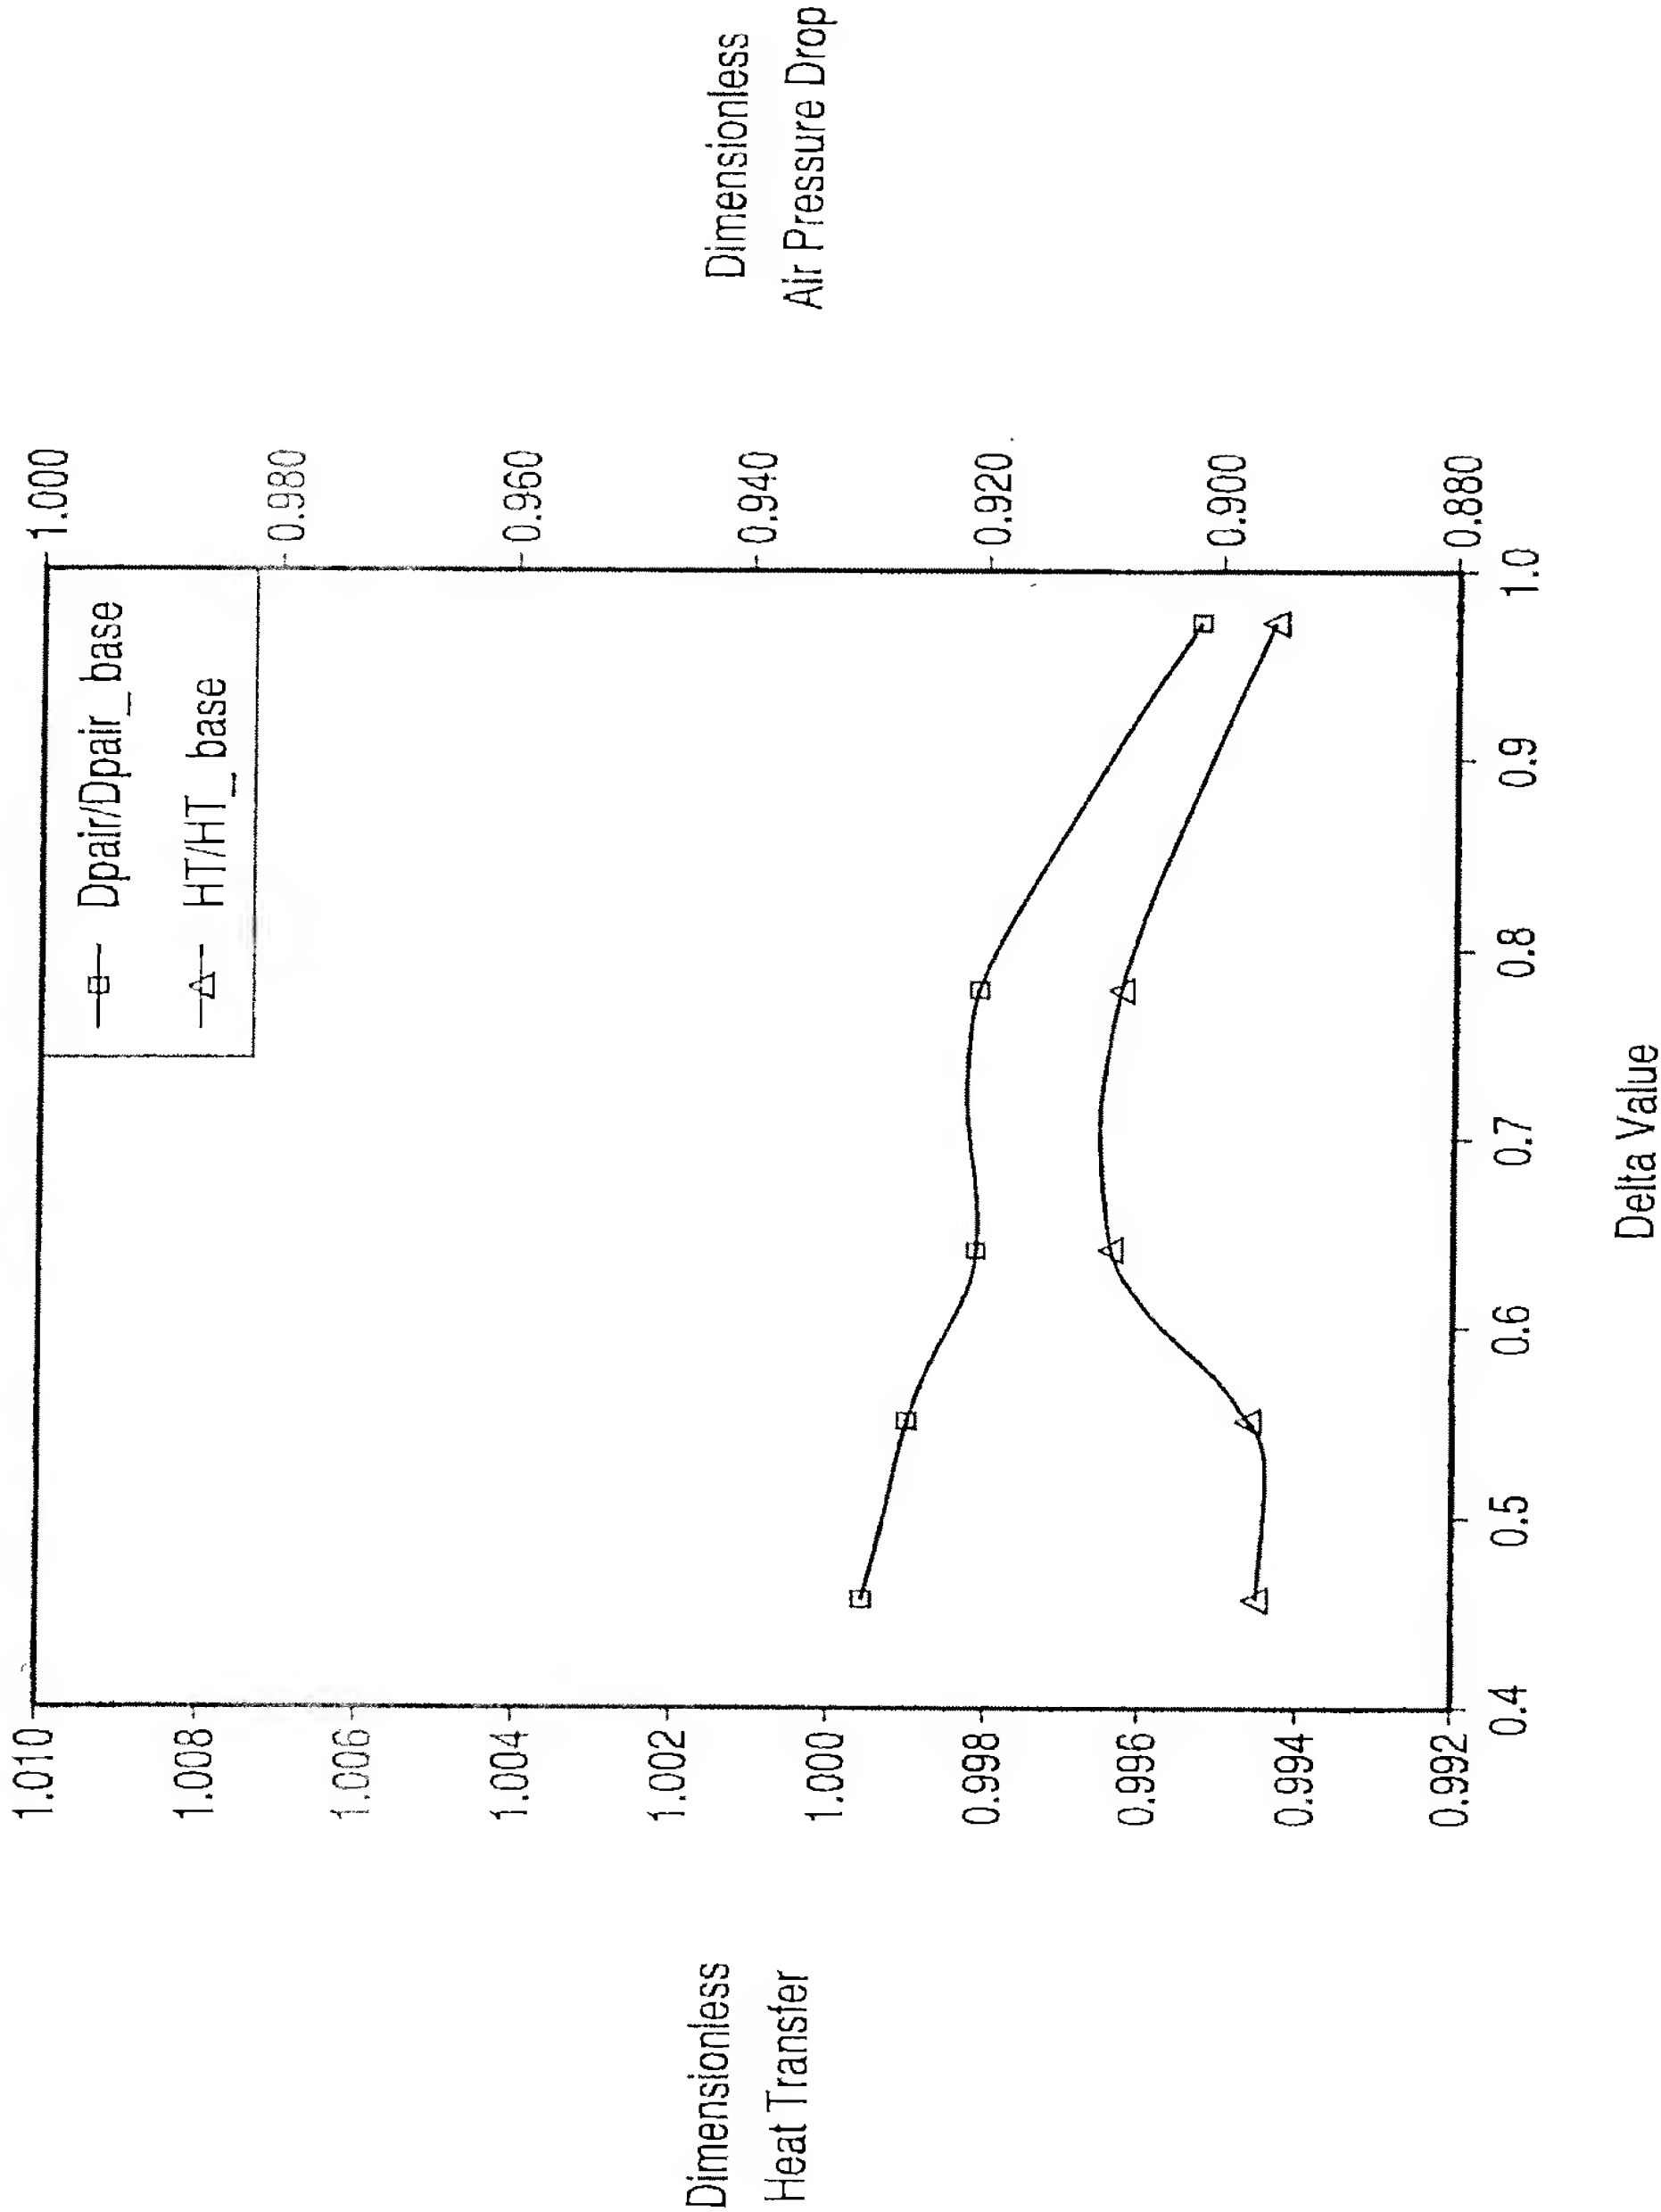

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/00147

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 F28F1/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F28F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 849 558 A (VALEO THERMIQUE MOTEUR) 24 June 1998 (1998-06-24) column 2, line 50 - column 3, line 18 column 6, line 44 - line 49 column 7, line 49 - line 57; figure 3 ---	1,6,7
P,X	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 11, 6 November 2002 (2002-11-06) -& JP 2002 205122 A (TOYO RADIATOR CO LTD), 23 July 2002 (2002-07-23) abstract ---	1
A	US 5 730 214 A (COWELL TIMOTHY ANTON ET AL) 24 March 1998 (1998-03-24) column 3, line 14 - column 5, line 41; figures 5-8 --- -/--	1

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

14 May 2003

Date of mailing of the international search report

21/05/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Beltzung, F

# INTERNATIONAL SEARCH REPORT

PCT/IB 03/00147

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PATENT ABSTRACTS OF JAPAN  vol. 2000, no. 26,  1 July 2002 (2002-07-01)  -&amp; JP 2001 241874 A (SHOWA DENKO KK),  7 September 2001 (2001-09-07)  abstract</p> <p style="text-align: center;">-----</p>	1

## INTERNATIONAL SEARCH REPORT

patent family members

PCT/IB 03/00147

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0849558	A	24-06-1998	FR 2757259 A1	19-06-1998
			EP 0849558 A1	24-06-1998
			JP 10185478 A	14-07-1998
			US 6543527 B1	08-04-2003
JP 2002205122	A	23-07-2002	NONE	
US 5730214	A	24-03-1998	NONE	
JP 2001241874	A	07-09-2001	NONE	